




## Fullrange Loudspeaker DP-15mkII



## DP-15mkII Fullrange Loudspeaker


SPECIFICATIONS	DP-15mkII
System Type	2-way 15" full range
Frequency Response	38Hz ~ 20kHz
Dispersion	100° x 50 (HxV)
Handling Power	600W(RMS) / 2400W(Peak)
Sensitivity	102dB @ 1w/1m
Maximum SPL	124.5dB
Impedance	8 ohms
Suspension	12 x M10 Flypoint
Dimensions (WxDxH)	465 x 388 x 710mm (Rear Width 135mm)
Nett Weight	xx kg

## EMINENCE® *inside* KAPPA-15LF Woofer

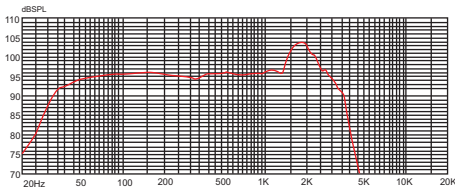

SPECIFICATIONS	KAPPA-15LF
Nominal Basket Diameter	15", 381mm
Impedance	8 Ω
Power Rating	600W
Music Program	1200W
Resonance	39Hz
Usable Frequency Range	35Hz~2kHz
Sensitivity	99dB
Magnet Weight	95oz
Gap Height	0.375", 9.52mm
Voice Coil Diameter	3", 76.2mm
MOUNTING INFORMATION	
Recommended Enclosure Volume (vented)	82-139 liters 2.9-4.9 cu.ft.
Overall Diameter	15.16", 384.9mm
Baffle Hole Diameter	13.77", 349.6mm
Front Sealing Gasket	fitted as standard
Rear Sealing Gasket	fitted as standard
Mounting Holes Diameter	0.25", 6.4mm
Mounting Hole B.C.D.	14.56", 369.9mm
Depth	6.375", 162mm
Shipping Weight	22.1lbs, 10kg

## EMINENCE® *inside* PSD-2002 Compression Driver

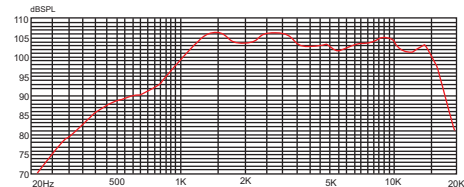

SPECIFICATIONS	PSD-2002
Throat size	1", 25.4mm
Impedance	8Ω
Power Rating (EIA426B spec, 1.6kHz @ 18dB)	80Wrms
Resonance	550kHz
Usable Frequency Range	1.2kHz-20kHz
Sensitivity (1mW in plane wave tube)	105dB
Magnet Weight	34oz.
Voice Coil Diameter	2", 51mm
Voice Coil Former	Kapton
Diaphragm Material	Titanium
MOUNTING INFORMATION	
Overall Diameter	5.25", 133mm
Depth	2.2", 56mm
Mounting Holes Diameter	2 x 1/4-20 on 3" BHC
	3 x M6 on 2.25" BHC