



Integrated Active System


IAS-10CX/IAS-115SA



IAS-10CX / IAS-115SA
Packing Status

* Speaker Stand not included with system

SPECIFICATIONS	IAS-10CX	IAS-115SA
Frequency Response	55Hz-20KHz	45Hz-18KHz
Drivers	Low 10"(64mm)x1 Hi 1"(34mm)x1	Low -15" x 1(100mm)
Impedance	8ohm	8ohm
Continuous Power Handling	200W	350W + 200W x 2
Peak Power	600W/5Min	1000W + 600W x 2/5Min
Angle (h x v)	90° Hx 90° V	-
Sensitivity	98 dB(1w/1m)	99 dB(1w/1m)
Power Supply	AC~240V(50Hz/60Hz)	AC~240V(50Hz/60Hz)
THD	-	<0.05%
Input Impedance	-	10 Kohm
Connectors	2xspeaker NL4(+/-1)	2xspeaker NL4(+/-1)
Dimensions	320x310x400mm	430x640x690mm
Packing Dimensions	380x370x460mm	755x495x710mm
Weight	13.4kg	53.2kg

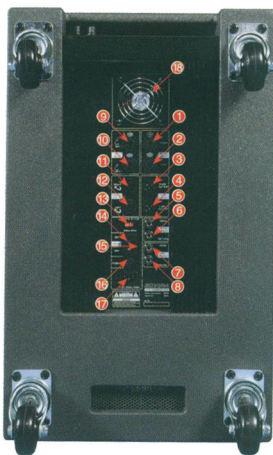

IAS-115SA REAR PANEL

- Left / Right channel of music input
- Left / Right output of mixed line signal
- External EQ send / return terminal
- External Mic effects send / return terminal
- Mic 1 / 2 input
- Left / Right channel speaker output
- 240V / 110V switch
- Power switch
- Power indicator
- Power fuse
- 3-core power cable input
- Fan ventilation gate



- Sub-bass frequency band adjustment
- Main channel low-cut band adjustment
- LCD screen
- Downward parameters selection
- Mute function
- Audio parameters selection
- Mic / Music volume "-" Knob
- Mic / Music volume "+" Knob
- Mic parameters selection
- Sub-bass parameters selection
- Upward parameters selection
- Gain adjusting for sub-bass equalizer
- Equalizer frequency adjusting for sub-bass