



Professional Boundary Microphone series

IVA 914

Installed Microphone

The IVA 914 boundary microphone is designed to have the flexibility in any installation situation. It is ideal for permanent installations. IVA 914 is a miniature, phantom powered condenser microphone that offers flexibility for surface mounted installations. Its compact and lightweight design enables it to be flushed mounted on tables, platforms, podiums walls or ceilings.




Specifications:

- Elements : Back Electric Condenser
- Polar Pattern : Omni directional
- Frequency : 20 ~ 18,000 Hz
- Sensitivity : -63dB \pm 3dB (0dB = 1 μ bar @ 1KHz)
- Impedance : 250 Ω \pm 30% (@1KHz)
- Material : Copper
- Operating Voltage : 9V ~ 52V DC Phantom Power w/ built-in circuitry
- Connector : XLR (male)
- Dimensions : Φ 28 x 3mm

Applications:

- Conferences
- Houses of worship
- Executive boardrooms
- Courtrooms
- Ticket windows
- Reception desks
- Bank counters

Frequency Response Graph:

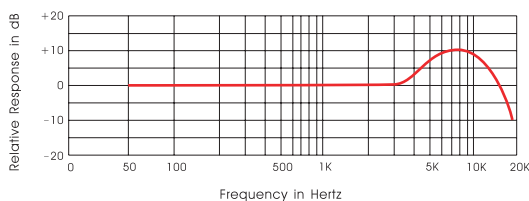

Polar Pattern:

