



IVA 936 Surface Mount Microphone

The IVA 936 phantom powered condenser boundary microphone comes in a space age inspired heavy-duty case. This makes it highly suitable for surface mounted applications involving high quality sound reinforcement in a demanding sound pick up situation. It also has a built-in circuitry with a dual pre-amplification system.




Specifications:

- Elements : Back Electric Condenser
- Polar Pattern : Cardioid
- Frequency : 50 ~ 18,000 Hz
- Sensitivity : $-60\text{dB} \pm 3\text{dB}$ ($0\text{dB} = 1\mu\text{bar}$ @ 1KHz)
- Impedance : $60\Omega \pm 30\%$ (@1KHz)
- Operating Voltage : 9V ~ 52V DC Phantom Power w/built-in circuitry
- Switch : On / Off
- Filter Switch : Flat / Low cut / Boost
- Material : Zinc Die-cast
- Connector : mini-XLR (male)
- Dimensions : 95 (L) x 92 (W) x 32.5 (H) mm

Applications:

- Conferences
- Houses of worship
- Executive boardrooms
- Courtrooms
- Ticket windows
- Reception desks
- Bank counters

Frequency Response Graph:

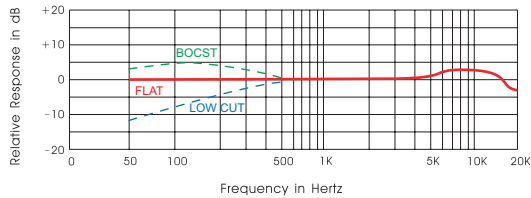

Polar Pattern:

