



Professional Dynamic Microphone

EXCEPTIONAL PERFORMANCE FOR ANY PERFORMER

IVA 1900ND Stage / Speech Microphone



Accessories:



6003
Holder




6403
Φ6.3 nickel-plated plug
and cannon XLR


Specifications:

- Element : Dynamic Moving Coil
- Polar Pattern : Cardioid
- Frequency Range : 70 Hz ~ 18,000 Hz
- Sensitivity : -70 dB ± 3 dB (0 dB = 1V μ bar @ 1 KHz)
- Impedance : 250 Ω ± 30% (@ 1KHz)
- Connector : XLR (male)
- Dimensions: Φ53.5 x 164.5mm

Frequency Response Graph:

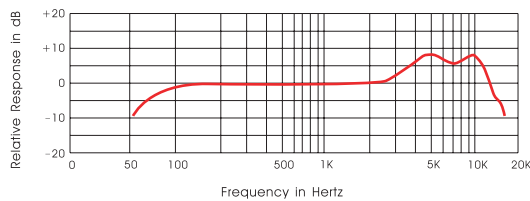

Polar Pattern:




IVA 506 Karaoke and General Purpose Microphone



Specifications:

- Element : Dynamic Moving Coil
- Polar Pattern : Cardioid
- Frequency Range : 70 Hz ~ 14,000 Hz
- Sensitivity : -75 dB ± 3 dB (0 dB = 1V μ bar @ 1 KHz)
- Impedance : 500 Ω ± 30% (@ 1,000Hz)
- Switch : Sliding type (On/Off)
- Connector : Φ3.5mm / Φ6.5mm
Mono plug
- Dimensions : Φ52 x 227mm

Frequency Response Graph:

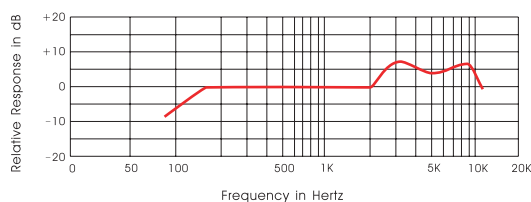

Polar Pattern:

