

CM2U





MADE IN CHINA

## COMPUTER SETUP

### Windows

**Step 1:** Plug the CM2U microphone into your computer. The computer will automatically recognize the USB device and install a driver.

**Step 2:** Right-click on the sound icon on the system tray and select **Sounds**.

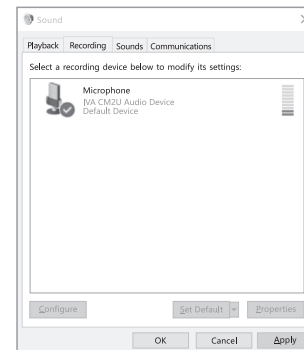

**Step 3:** Click the Recording tab and select the **IVA CM2U Audio Device** and click on the **Set Default** button.



5 EN

## COMPUTER SETUP

### macOS


**Step 1:** Plug the CM2U microphone into your computer. The computer will automatically recognize the USB device and install a driver.

**Step 2:** Open your **System Preferences**.

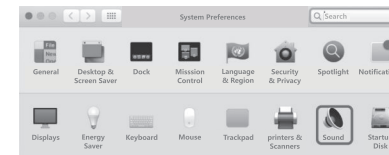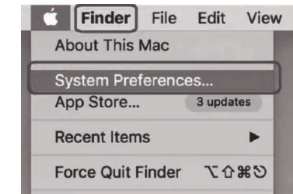

**Step 3:** Click **sound** to display the Sound preference pane.


**Step 4:** Click the Input tab and select the **IVA CM2U Audio Device** as the device for sound input.

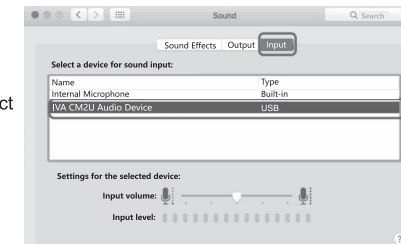


6 EN

## INSTRUCTION MANUAL

### CM2U USB CONDENSER MICROPHONE

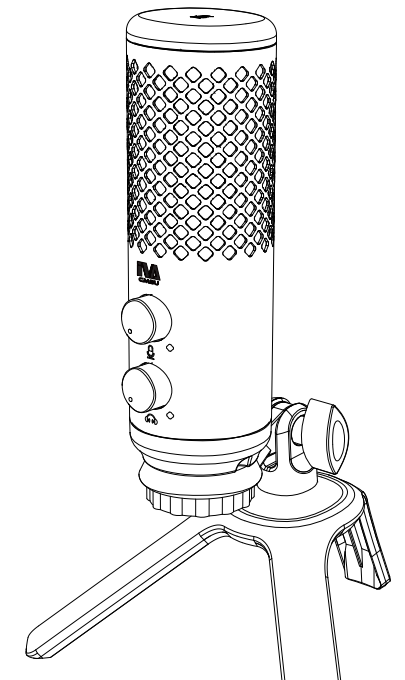


## ACCESSORIES

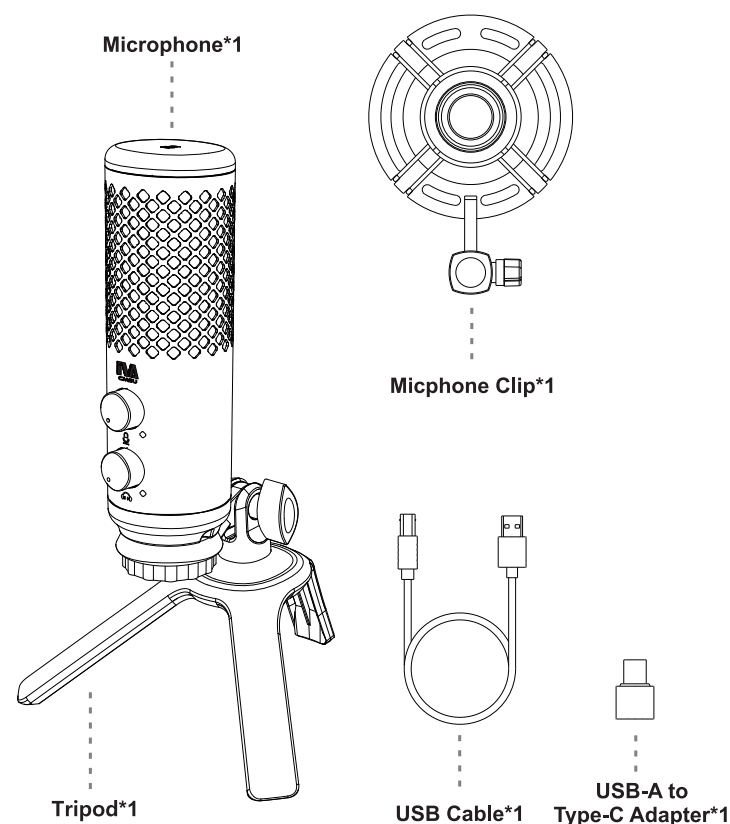


1 EN

## INSTRUCTIONS

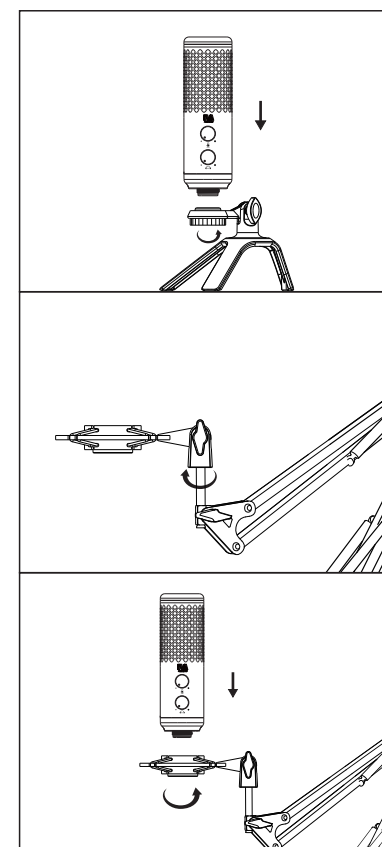

2 EN


## INSTRUCTIONS

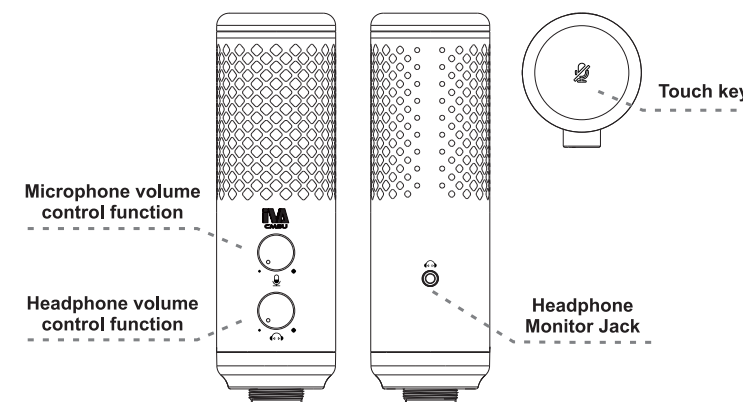

1. Screw the microphone onto the tripod or shock mount.
2. Plug the Type-A plug to PC or laptop and plug the Type-B plug to the microphone and start to use.
3. Microphone volume control function  
Turn left to turn down the volume, turn right to turn up the volume.
4. Headphone Monitor Jack  
Microphone supports zero latency monitor function.
5. Headphone volume control function  
Turn left to turn down the volume, turn right to turn up the volume.
6. Touch Key  
Short press the touch button to mute or wake up the microphone, meanwhile the light will be turned off or on.  
Long press the touch button to turn on or off the light only.

3 EN

## SPECIFICATIONS

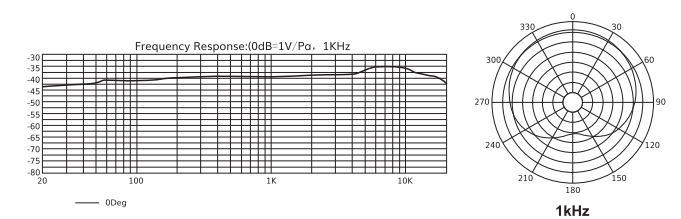

<b>Polar Pattern:</b>	Cardioid
<b>Input Sample Rate:</b>	96kHz
<b>Bit Rate:</b>	24Bit
<b>Frequency Response:</b>	20Hz-20kHz
<b>Sensitivity:</b>	-40dB±2dB (0dB=1V/Pa, at 1kHz)
<b>Output Impedance:</b>	2.2kΩ
<b>Max. SPL:</b>	110dB
<b>THD+N:</b>	<1%
<b>S/N Ratio:</b>	95dB
<b>USB Cable Length:</b>	2m

4 EN